

Pressure Washer Cleaning Systems



Systems • Equipment • Products • Services

STEAM, HOT, COLD



HEAVY DUTY - ELECTRIC SERIES

STANDARD FEATURES:

- AR Triplex Plunger Pump - Low Speed 1725RPM
- Marathon 2hp Electric TEFC Motor - 115VAC Unit
- Baldor Electric Motors on 230VAC units
- Beckett Precision Custom Burners
- Powder Coated Industrial Grade Frame
- 10" Pneumatic Tires
- Schedule 80 Spiral Wrapped Heating Coil
- Stainless Steel Coil Wrapper
- Stainless Steel Float Tank
- Trigger Gun Control with 4ft Lance and Quick Coupled Color Coded Spray Tips
- GFCI with 35 ft Power Cord
- Over Temperature Protection
- 50ft 3/8" 4000PSI Wash Hose with Quick Connects
- In line Fuel Filter
- Poly 7 Gallon Fuel Tank with Gauge
- Hose Reel Mounting Bracket
- Positive Action Float Valve on Float Tanks
- Hose and Gun Hanger
- Spray Tip Holder with Grommets

For Outdoor Use Only



| MODEL | GPM | PSI | HP | VOLT | Ph | AMPS | FLOAT TANK | DRIVE | SHIPPING WEIGHT | DIMENSIONS |
|---------|-----|------|-----|------|----|------|------------|---------|-----------------|-----------------|
| 1250 | 2.2 | 1400 | 2.0 | 115 | 1 | 20 | Yes | | 330 | 23W x 30L x 39H |
| 21 | 2.2 | 1250 | 2.0 | 115 | 1 | 20 | Yes | | 385 | 24W x 34L x 40H |
| 3130KC* | 2.2 | 1250 | 2.0 | 115 | 1 | 20 | Yes | | 400 | 26W x 36L x 42H |
| 35 | 3.5 | 2400 | 6.0 | 230 | 1 | 28 | Yes | | 475 | 26W x 36L x 42H |
| 42 | 4.0 | 2000 | 5 | 230 | | 28 | | Direct | 520 | 28W x 39L x 47H |
| 43SC | 1.8 | 300 | 1.5 | 115 | | 15 | | Direct | 500 | 28W x 39L x 47H |
| 4020 | 4.0 | 2300 | 6 | 230 | | 28 | | Belt GP | 525 | 28W x 39L x 47H |
| 4030 | 4.0 | 3000 | 7.5 | 230 | | 32 | | Belt GP | 580 | 28W x 39L x 47H |

* KC - Kitchen Cleaner comes complete w/adjustable thermostat, high pressure detergent & R2 hose to a max temp of 275 degrees

Model 43SC Steam Cleaner is an open steam gun system with 50' of 1/2" steam hose & nozzle

4 WHEEL ELECTRIC SERIES

STANDARD FEATURES:

- Powder Coated Extra Heavy Duty Frame, Belt Guard & Electric Box
- Baldor Electric Motor
- Sch 80 Black Pipe Heating Coil
- Gun Control with 4' Insulated Lance
- Quick Coupled Color Coded Spray Tips
- High Pressure Detergent
- 50' High Pressure Quick Coupled Hose
- 7 Gallon Poly Fuel Tank with Gauge
- 4 Wheel - 10" Pneumatic Tubed Tires
- Stainless Steel Float Tank w/Cover
- In-Line Fuel Filter
- High Limit Over Temp Protection
- Hose Reel Mounting Bracket
- Rotary Cam Switch
- Beckett Burner
- Stainless Steel Coil Wrapper
- 460V Units Have 10' Power Cord without GFCI or Plug
- Spring Release Brake
- GFCI with 35 ft Power Cord on Units under 30 Amps

For Outdoor Use Only



| MODEL | GPM | PSI | HP | VOLT | DRIVE | AMPS |
|---------------------------|-----|---------|-----|------|-----------|------|
| SINGLE PHASE UNITS | | | | | | |
| 15-281 | 2.8 | 1000 | 2 | 115 | Belt GP | 20 |
| 15-423 | 4.0 | 2300 | 6 | 230 | Belt GP | 28 |
| 15-42 | 4.0 | 2000 | 5 | 230 | Direct AR | 28 |
| THREE PHASE UNIT | | | | | | |
| 15-430-3 | 4.0 | 3000 | 7.5 | 230 | Belt GP | 25 |
| OPTIONS | | | | | | |
| 15-460-3 | | 3-Phase | | 460 | Belt GP | |

PORTABLE - GAS ENGINE, DIRECT DRIVE 4 WHEEL

STANDARD FEATURES:

- 4 Wheel - 10" Pneumatic Tubed Tires
- Powder Coated EHD Frames
- Sch. 80 Black Pipe Heating Coil
- Stainless Steel Coil Wrapper
- 50' 3/8" Quick Coupled Hose
- Gun Control with Dual Lance Wand
- Color Coded Spray Tips
- Direct Drive, Triplex, Ceramic Plunger Pump
- Low Pressure Detergent
- 12VDC Beckett Burner
- High Limit Over Temp Protection
- Thermal By-Pass Protection
- Poly Diesel Tank with Fuel Gauge
- Easy Start Unloader Valve
- Poly Battery Box - Requires Group 24 Battery (Not Included)
- Anti-Roll Tire Brake



For Outdoor Use Only

| MODEL | GPM | PSI | HP | ENGINE | BURNER | START | SHIPPING WEIGHT | DIMENSIONS |
|-------|-----|------|-------|--------|--------|----------|-----------------|-----------------|
| 1535 | 3.5 | 3500 | GX390 | Honda | 12VDC | Electric | 545 | 29W x 51L x 44H |

PORTABLE - GAS ENGINE, BELT DRIVE 4 WHEEL

For Outdoor Use Only

STANDARD FEATURES:

- 4 Wheel - 10" Pneumatic Tubed Tires
- Powder Coated EHD Frames
- Sch. 80 Black Pipe Heating Coil
- Stainless Steel Coil Wrapper
- 50' 3/8" Quick Coupled Hose
- Gun Control with Dual Lance Wand
- Color Coded Spray Tips
- Belt Driven General Pump
- Low Pressure Detergent
- 12VDC Beckett Burner
- High Limit Over Temp Protection
- Thermal By-Pass Shutdown
- Poly Diesel Tank with Fuel Gauge
- Anti-Roll Tire Brake
- Electric Start Engine
- Front Bumper - Protects Engine and Fuel Tank
- Requires Group 24 Battery (Not Included)
- Powder Coated Gas Tank
- GX390 does not require external gas tank

*May be used with mobile water tanks - Requires additional Plumbing and Inlet Filter - Minimum 3/4"




Shown with optional front roll cage

| MODEL | GPM | PSI | HP | ENGINE | BURNER | START | SHIPPING WEIGHT | DIMENSIONS |
|-------|-----|------|-------|--------|--------|----------|-----------------|-----------------|
| 1535B | 4.0 | 3500 | GX390 | Honda | 12VDC | Electric | 525 | 29W x 52L x 46H |

HOT WATER SKIDS - VERTICAL COIL SERIES

STANDARD FEATURES:

- Powder Coated EHD Frame
- Stainless Steel Coil Wrapper & Control Panel
- High Limit Over Temp Protection
- 50' R2 High Pressure Hose
- Sch. 80 Black Pipe Heating Coil
- Gun Control with 4' Lance
- Color Coded Spray Tips
- Poly Battery Box
- Belt Driven General Pump
- Hour Meter
- High Pressure Detergent
- 2500 Watt Generator - G Models
- Thermal By-Pass Protection
- 10 Gal. Diesel Tank
- 7 Gal. EPA approved Gas Tank
- Plumbed for Remote Tank
- Electric Start
- Beckett Burner
- Pressure Relief Valve
- Heavy Duty Unloader Valve
- 12VDC Burner - Requires Group 24 Deep Cycle Battery (Not Included)

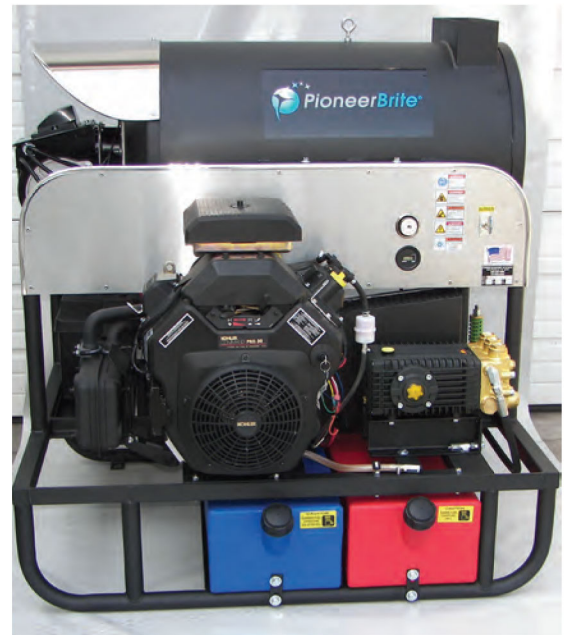

| MODEL | GPM | PSI | HP | ENGINE | BURNER | SHIPPING WEIGHT | DIMENSIONS | |
|--------|-----|------|-------|--------|--------|-----------------|---------------------|-------------|
| 5535H | 5.6 | 3500 | GX630 | Honda | 12VDC | 730 | 40.5W x 41.5L x 54H | \$10,695.00 |
| 5535HG | 5.2 | 3500 | GX630 | Honda | 115VAC | 730 | 40.5W x 41.5L x 54H | \$12,095.00 |

TRAILER SERIES - COMMERCIAL SUPREME

STANDARD FEATURES:

- Tandem 3500 lb. Axle
- Electric Brakes
- New 15" Chrome Wheels
- EHD Steel Tubing Frame
- Swing Up Jack with Heavy Duty Coupler
- DOT Approved Recessed LED Lights
- 300 Gal. Water Storage Tank
- 2 ea. 25 Gallon Detergent Tanks
- PVC 3-Way Ball Valve with Drain
- In-Line Water Filter
- Chemical Selector
- 100' R2 High Pressure Hose
- Aluminum Tool Box
- Pivoting Hose Reel
- Black Automotive Paint
- Brake-A-Way Kit with Battery

SPECS:

- Overall: 6'10" Wide x 16' Long
- Payload: 5,300 lbs.

OTHER OPTIONS:

- 100' Pivoting Hose Reels
- Inlet 200' Water Hose Reel
- Hudson Float Valve
- Inlet 120' Water Hose
- Ladder Rack
- 6,000lb Axles with 500gal Water Tank
- Customer Lettering on Water Tank



TRAILER OPTIONS:

- 98-960 Custom Painting, Automotive Paint (Specify)
- 98-962 Inlet Water Control Valve w/120' Hose & Hose Reel
- 98-968 Battery Installed
- 98-969 Electric Brake for 2nd Axle
- 98-972 Spare Tire and Mounting Assembly


See Hot Water Skid standard features for machine specifications and options

Add the Machine of your Choice
Shown with optional Industrial Skid with
Stainless Steel Coil Cover

HOT WATER SKIDS - HORIZONTAL COIL SERIES

STANDARD FEATURES:

- Powder Coated EHD Frame
- Stainless Steel Control Panel
- High Limit Over Temp Protection
- 50' R2 High Pressure Hose
- Sch. 80 Black Pipe Heating Coil
- Gun Control with 4' Lance
- Color Coded Spray Tips
- Poly Battery Box
- Belt Driven General Plunger Pump
- Hour Meter
- 2500 Watt Generator - G Models
- Thermal By-Pass Protection
- 10 Gal. Diesel Tank
- 7 Gal EPA approved Gas Tank
- Plumbed for Remote Tank
- Beckett Burner
- Pressure Relief Valve
- Heavy Duty Unloader Valve
- 12VDC Burner - Requires Group 24 Deep Cycle Battery (Not Included)

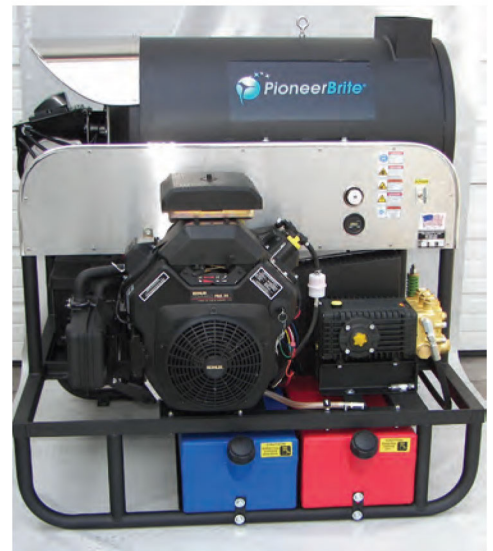

SHIPPING WEIGHT DIMENSIONS

| MODEL | GPM | PSI | HP | ENGINE | BURNER | SHIPPING WEIGHT | DIMENSIONS |
|---------|-----|------|-------|----------|--------|-----------------|---------------------|
| 5535HZH | 5.6 | 3500 | GX630 | Honda | 12VDC | 780 | 42.5W x 41.5L x 50H |
| 5535HZV | 5.6 | 3500 | 18 | Vanguard | 12VDC | 780 | 42.5W x 41.5L x 50H |

COLD WATER - ELECTRIC

STANDARD FEATURES:

- Heavy Duty Aluminum Frame
- Inlet Filter
- 10" Pneumatic Tires
- Dual Padded Shock Absorbing Feet
- Thermal By-Pass Protection
- Low Pressure Detergent with Quick Connects
- 50' 3/8" Quick Coupled High Pressure Hose
- Trigger Gun Control
- 4' Lance with Quick Connect Soap Tip
- Color Coded Quick Connect Tips (0, 15, 25, 40 & Soap)
- Industrial Strength Electric Motor



- Triplex, Oil Bath, Ceramic Plunger Pump
- 35ft GFCI Power Cord

| MODEL | GPM | PSI | HP | VOLTS | AMPS |
|------------------------------|-----|------|-----|-------|------|
| CWE2100 | 2.0 | 1000 | 1.5 | 115 | 15 |
| CWE3330 | 3.0 | 3000 | 6 | 230 | 26 |
| Base Plate Skid Option | | | | | |
| Base Plate Hand Held Option | | | | | |
| Base Plate Wall Mount Option | | | | | |

COLD WATER GAS ENGINE

STANDARD FEATURES:

- Heavy Duty Aluminum Frame
- Triplex, Oil Bath, Ceramic Plunger Pump
- Inlet Water Filter
- Adjustable Unloader
- Low Oil Shutdown
- 10" Pneumatic Tires
- Thermal By-Pass Protection
- Honda Engine
- Low Pressure Detergent with Quick Connects
- 50' 3/8" Quick Connect High Pressure Hose
- Trigger Gun Control
- 4' Insulated Lance
- Color Coded Quick Connect Spray Tips 0, 15, 25, 40 and Soap Tip



| MODEL | GPM | PSI | HP | ENGINE | DRIVE |
|-----------|-----|------|-------|--------|--------|
| CWGA3300D | 3.0 | 3000 | GX270 | Honda | Direct |
| CWGA4350D | 4.0 | 3500 | GX390 | Honda | Direct |

TWO STEP REMOTE HOSES & WIRELESS REMOTES



Wireless Remotes available in Frequencies 1 thru 6. For Additional or Replacement Transmitters please specify frequency

| PART # | DESCRIPTION |
|---------|---|
| 3611050 | 50' Remote Hose 5W Electric |
| 3611080 | 80' Remote Hose 5W Electric |
| 3611100 | 100' Remote Hose 5W Electric |
| 3611120 | 120' Remote Hose 5W Electric |
| 3612100 | 100' Remote Hose 5W Gas |
| 3612120 | 120' Remote Hose 5W Gas |
| 3611199 | 80' Remote Hose 6W Electric |
| 3611200 | 100' Remote Hose 6W Electric |
| 3611201 | 120' Remote Hose 6W Electric |
| 3623125 | 100' Remote Hose CPC |
| 3623128 | 120' Remote Hose CPC |
| 3660036 | 3' Stainless Steel Wand |
| 3660060 | 5' Stainless Steel Wand |
| 3660080 | 7' Stainless Steel Wand |
| 99-350 | Wireless Remote Complete - Two Step & Retrofit |
| 99-351 | Wireless Remote Complete - Two Step/ Stationary - Electric |
| 99-352 | Wireless Remote Complete - Two Step/ Gas Engine/Skid with Clutch |
| 99-353 | Wireless Remote Complete - Two Step/ Gas Engine/Skid without Clutch |
| 99-355 | Transmitter - Additional or Replacement |
| 0198350 | Waterproof Case for Wireless Remote |

TWO STEP SERIES - ELECTRIC COLD WATER

STANDARD FEATURES:

- Belt Driven CAT Pump
- Precise Chemical Injection
- Industrial Strength Electric Motor
- Color Coded Chemical Pick Up Tubes
- Powder Coated HD Frame
- Hour Meter
- Indicator Lights on Control Panel
- Safe 24 Volt Controls
- Removable Stainless Steel Float tank w/ Cover
- 7' Stainless Steel Wand



Clean trucks, buses and vans with cold water without brushing. Refer to our Two Step Truck Washing brochure for additional information.

SHIPPING WEIGHT

| MODEL | GPM | PSI | HP | VOLT | Ph | AMPS | WEIGHT |
|-------|-----|------|----|---------|----|-------|--------|
| 417 | 4.0 | 2000 | 5 | 208/230 | 1 | 25/23 | 225 |
| 515 | 5.0 | 1500 | 5 | 208/230 | 1 | 25/23 | 245 |

TWO STEP SERIES GAS ENGINE COLD WATER

STANDARD FEATURES:

- Belt Driven CAT Pump
- Hour Meter
- Powder Coated HD Frame
- 7' Stainless Steel Wand
- Precise Chemical Injection
- Color Coded Chemical Pick Up Tubes
- Indicator Lights on Control Panel
- Stainless Steel Float Tank (Removable)



MODEL GPM PSI HP DRIVE ENGINE WEIGHT

| | | | | | | |
|------|-----|------|-------|--------|-------|-----|
| 420B | 4.0 | 2000 | GX390 | Belt | Honda | 300 |
| 420C | 4.0 | 2000 | GX390 | Clutch | Honda | 300 |

HOT WATER SYSTEM - STAINLESS/PAINTED STANDARD FEATURES:

- Stainless Steel (SS) or Painted (PT) Frame
- Belt General Pump
- 24 Volt Control
- Time Delay Shutdown - Push Button Restart
- Robert Shaw Ignition Burner Controls
- Hour Meter
- Adjustable Thermostat
- Sch 80 Black Pipe Heating Coil
- High Pressure Detergent
- 50' 3/8" Quick Coupled Hose
- Trigger Gun with 4' Lance
- Quick Coupled Spray Tips
- NG or LP Fired - Electronic Ignition
- Stainless Steel Float Tank
- Pressure Relief Valve
- Heavy Duty Unloader Valve
- 10' Power Cord, No Plug on Units



| MODEL | GPM | PSI | HP | VOLT | Ph | AMPS | SHIPPING WEIGHT | DIMENSIONS |
|---------|-----|------|-----|------|----|------|-----------------|-----------------|
| 6400-SS | 4.0 | 2300 | 6.0 | 230 | 1 | 25 | 600 | 20W x 54L x 44H |
| 6600-SS | 5.0 | 2000 | 7.5 | 230 | 1 | 36 | 720 | 20W x 54L x 54H |
| 64-PT | 4.0 | 2300 | 6.0 | 230 | 1 | 25 | 600 | 20W x 54L x 44H |
| 66-PT | 5.0 | 2000 | 7.5 | 230 | 1 | 36 | 720 | 20W x 54L x 54H |

HOT WATER SYSTEM - PAINTED MINI

STANDARD FEATURES:

- Triplex, Oil Bath, Ceramic Plunger Pump
- 50' 3/8" Quick Coupled Hose
- Industrial Strength Electric Motor
- Sch. 80 Black Pipe Heating Coil
- Low Pressure Detergent
- Flow Switch
- Black Powder Coated Industrial Grade Frame
- High Limit Over Temp Protection
- Trigger Gun Control with Dual Lance
- Stainless Steel Coil Wrapper
- NG or LP Fired - Standing Pilot w/ 24VAC Gas Valve
- Quick Coupled Color Coded Spray Tips
- Pressure Relief Valve
- Heavy Duty Unloader Valve
- GFCI with 35 ft Power Cord



| MODEL | GPM | PSI | HP | VOLT | Ph | AMPS |
|--------|-----|------|----|------|----|------|
| 6-4230 | 4.0 | 2300 | 6 | 230 | 1 | 28 |

Automotive Industry

Healthcare

Lodging

Education

Agricultural

Food Service

Office Building

Manufacturing

Quality, Service, Price...Exceeding Expectations

Use the right product for the right job...

PioneerBrite has the solutions for your cleaning challenges. We can provide for all of your cleaning chemical needs. Call us today for more information on: Green Certified chemicals, DFE chemicals (Designed for the Environment) and Specialty Chemicals.



We Service.

Did you know that PioneerBrite repairs and services machines?

We provide on-site preventative maintenance & rentals too.

For all parts & accessories to compliment your pressure washing system, see our Parts & Accessories Catalog.



PioneerBrite, Inc. • 1381 Heistan Place • Memphis, TN 38104
Phone: 1-800-783-7320 • Fax: 901-725-7697 • Email: info@pioneerbrite.com